











INSTRUCTIONS FOR GARMENT RACK

Richards

Item number 958C

CONTENTS

- 1** X2 
- 2** X2 
- 3** X2 
- 4** X4 
- 5** X2 
- 6** X1 
1 each at 1 1/4" Diameter x 33 1/2"
- 7** X2 
2 each at 1 1/8" Diameter x 35 1/2"
- 8** X2 
2 each at 1 1/4" Diameter x 31 1/2"
- 9** X2 
2 each at 3/4" Diameter x 31 1/4"
- 10** X2 
2 each at 1 1/8" Diameter x 13 3/4"

Please note:

To save packing space, parts #7 tubes are packed inside parts #8.

Parts #10 tubes are packed inside parts #6.


Please remove all tubes, and inspect to confirm that you have removed all tubes packed other tubes before assembling.

WARNING

1. Please follow the step-by-step assembly instructions.
2. Keep top cross bar horizontal when in use.
3. Do not use rack for anything other than its intended use.
4. Do not allow children to hang from or ride on garment rack.
5. Keep away from heat sources such as heaters and fireplaces.
6. This product was designed for indoor use.
7. Do not overload one garment rack rod compared to the other. It is important to maintain some weight balance to prevent the rack from tipping. 50 lbs. maximum distributed evenly.

STEP 1


Assemble lower half of frame
By inserting poles **9** into the
Bases parts **1**

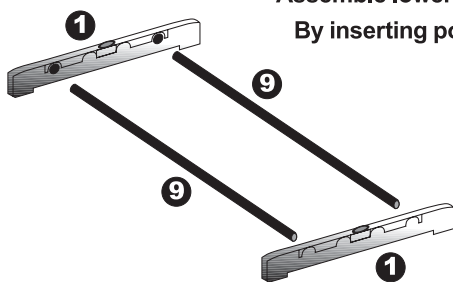

NOTE: For a tighter, sturdier assembly, we recommend the light tapping of parts **8** & **9** into their respective plastic receptacles using a rubber mallet or a cloth covered hammer to prevent surface marring.

STEP 2


Insert the poles part **8** into the now assembled base

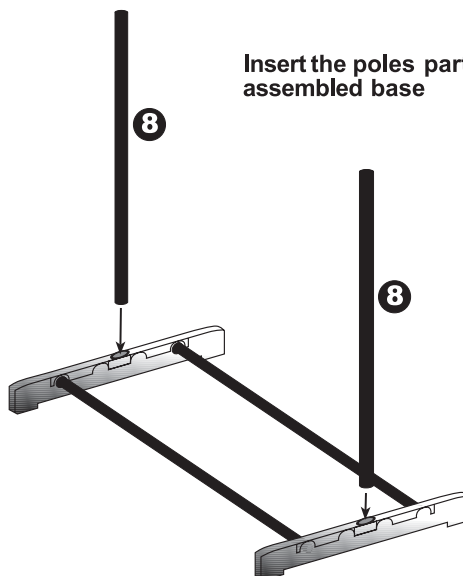


STEP 3

Assemble top bar by inserting Poles **6** and **7** into part **3**.

NOTE: Part **3** has a larger diameter opening on one end to insert pole **6**. For a tighter, sturdier assembly, we recommend the light tapping of parts **6** & **7** into part **3** using a rubber mallet or a cloth covered hammer to prevent surface marring.

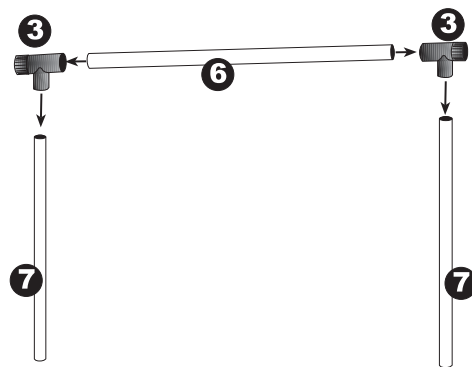

STEP 4

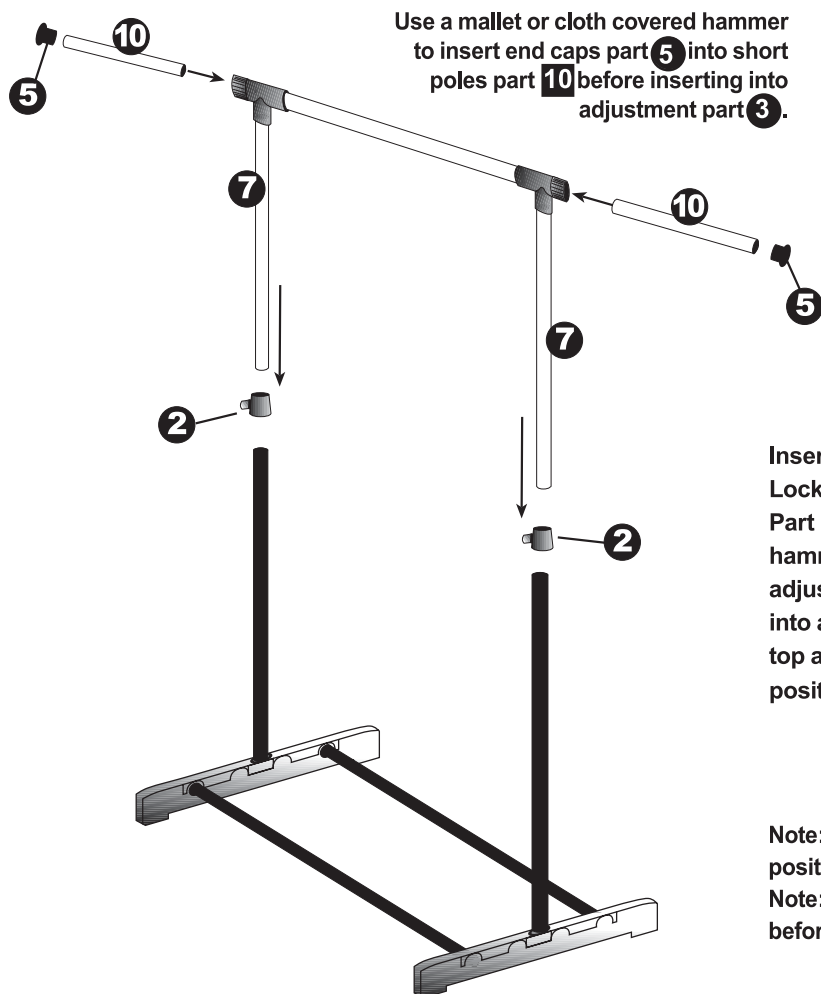

Use a mallet or cloth covered hammer to insert end caps part **5** into short poles part **10** before inserting into adjustment part **3**.

Insert adjustment


Locks part **2** onto poles

Part **8** tap with a rubber mallet or cloth covered hammer then insert top assembly with poles part **7** into adjustment locks. Flip locks inward to lock pipes part **7** into a stable position. Insert extension poles part **10** into top adjustment locks. Turn top adjustments towards locked position to secure poles into position.

Note: It is not necessary to turn locks completely to locked position to secure extension poles.

Note: To prevent rack from flipping, always fill main rod before hanging clothes on extensions.

STEP 5

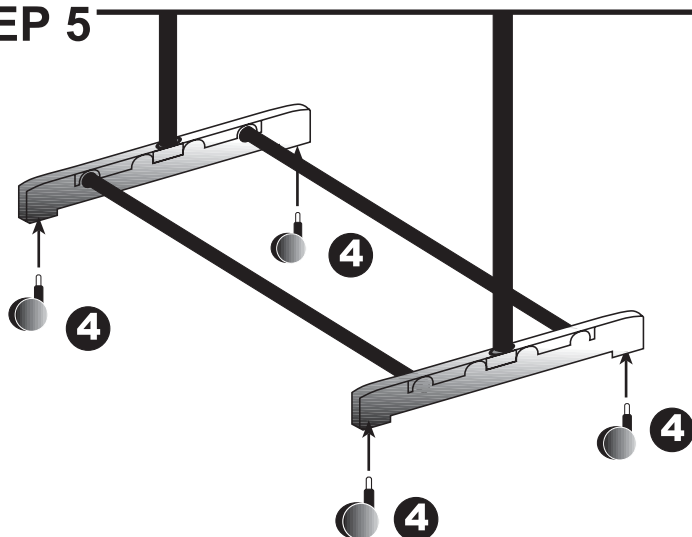

Finish up the assembly by inserting the castors part **4** into the bottom of the frame part **1**. Pushing in with your hands only until they snap into place.